

Hydraulic Vertical Baler

DIXI®

4 S

... with a compaction force of 4 t –
the proven, economical,
hydraulic compact baler



**DIXI
5 S-K**

Compaction force 6 t
Bale weight 40-60 kg



**DIXI
10 S**

Compaction force 8,5 t
Bale weight 50-80 kg



**DIXI
18 S**

Compaction force 18 t
Bale weight 120-180 kg



**DIXI
25, 30 S**

Compaction force 25-30 t
Bale weight 250-360 kg



**DIXI
60, 80 S**

Compaction force 60-80 t
Bale weight 340-700 kg




DIXI® 4 S

The proven and economical hydraulic compact baler. All of the equipment including the cylinder and baling straps, is integrated in the compact housing. Advantages: feeding from the top makes this a space-saving solution. Being visually attractive makes this baler suitable for areas frequented by the public. The small floor space required of approx. 0,7m² allows the DIXI 4 S to be placed in relatively narrow recesses.

- Easy operation - high safety standard.
Rapid compacting cycle, automatic ram return, low noise level.
- Hold-down claws prevent stubborn materials from springing back.
- Visual indicator to show when full bale size is reached.
- Simple, low effort bale binding - low bale weight.
- Slight V-shaped press chamber aids in bale removal.
- Sturdy, compact, low-maintenance design.



Adaptor to compact cans (Special equipment)

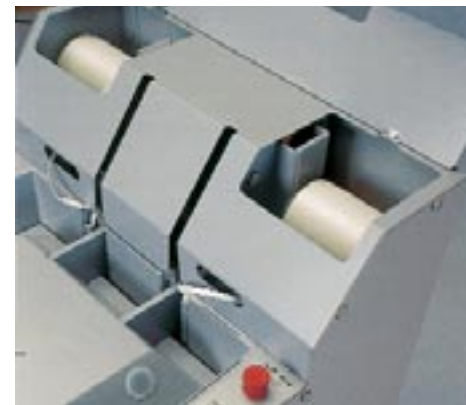


Easy accessible tying tapes.

Model DIXI		4 S
Motor	kW	1,5
Voltage	V/Hz	230/50 400/50
Compaction force max.	t	4
Cycle time	s	14
Compaction time	s	9
Opening w x h	cm	60 x 50
Opening height from floor	cm	118
Bale size w x h x d approx.	cm	60 x 55 x 60
Bale weight* max.	kg	30-50
Overall width	cm	77
Overall depth	cm	94
Overall height	cm	143
Gross weight	kg	350

*depending upon type of material
Technical details and colours subject to change without notice. (01.04)

Special equipment:

- Adaptor to compact cans
- Bale trolley
- Mobile on castors



DIXI 4 S -
connection to every
230 V plug socket
possible.



DIXI®

Baling systems
for the volume reduction
of recyclable material